



PEFY-P125VMH-E


Indoor Unit

High Static Pressure Ceiling Concealed Ducted



With improved design flexibility as a result of increased external static pressure, the PEFY-P-VMH-E allows authentic duct air conditioning within the strictest aesthetic confines.

- **External static pressure of 200Pa**
- **Greater flexibility for duct extension, branching air outlet configuration**
- **Reduced noise levels thanks to the use of newly designed centrifugal fan**
- **Duct can be connected to intake side**
- **Drain lift-pump (option) 550mm of lift**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

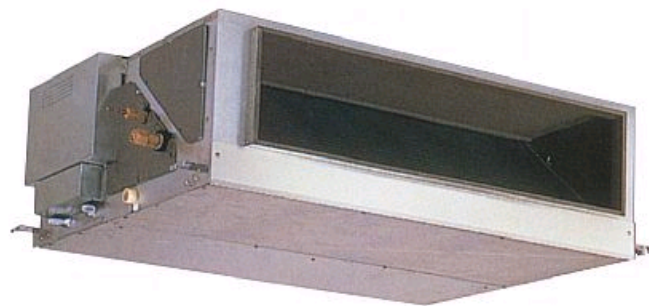


Pictures not to scale

Product Details

| PEFY-P125VMH-E | |
|--|----------------|
| Capacity (kW): | |
| Heating (Nominal) | 16.0 |
| Cooling (Nominal) | 14.0 |
| Heating (UK) | 14.8 |
| Cooling (UK) | 13.2 |
| R410A High Sensible Cooling (UK) | 10.2 |
| SHF R410A (UK) | 0.74 |
| SHF High Sensible R410A (UK) | 0.81 |
| Power Input (kW) Heating (Nominal) | 0.48 |
| Power Input (kW) Cooling (Nominal) | 0.48 |
| Airflow(m ³ /min) - Lo-Hi | 26.5-38 |
| External Static Pressure Pa - Lo-Mi-Hi | 100-150-200 |
| Noise (dBA) - Lo-Hi | 38-44 |
| Width - mm | 1200 |
| Depth - mm | 900 |
| Height - mm | 380 |
| Weight - kg | 70 |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Mains Cable No. Cores | 3 |
| Running Current (A) - Heating | 2.34 |
| Running Current (A) - Cooling | 2.34 |
| Fuse Rating (BS88) - HRC (A) | 6 |

Dimensions

PEFY-P125VMH-E

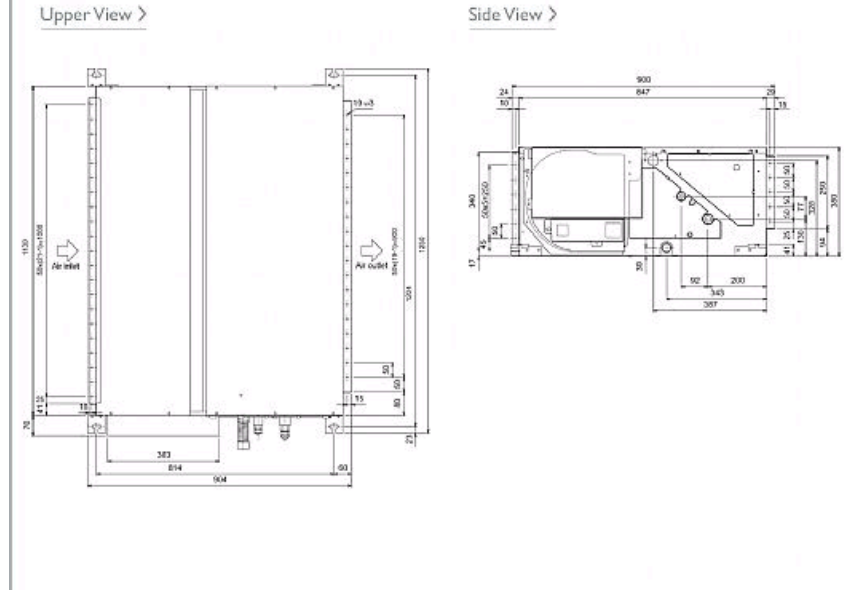

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

