



# PFD-P250VM-E


Downflow Indoor Unit

R410A Heat Pump or Cooling Only Close Control System



Mitsubishi Electric's new Close Control System is specifically designed for computer rooms, laboratories etc, where a need for high sensible cooling and close control of temperature and humidity is required. Because of the need for close control 24 hours a day, 365 days a year, a newly developed inverter driven compressor has been incorporated into the outdoor unit, maximising the energy efficiency of the PFD series. It is also able to be connected to a computer network using our G50 Controller, in order to monitor and provide remote email alarms.

- **High Sensible Cooling**
- **Energy efficient with high COP's**
- **Close control of temperature,  $\pm 1^{\circ}\text{C}$**
- **Easy to install - no service space needed at the rear of the unit**
- **Optional third party humidifier available**
- **Quick recovery following power failure**
- **Improved pipe runs - connects to PUY-P250YGM-A or PUHY-P250YGM-A outdoor units**
- **Return or discharge air temperature control**

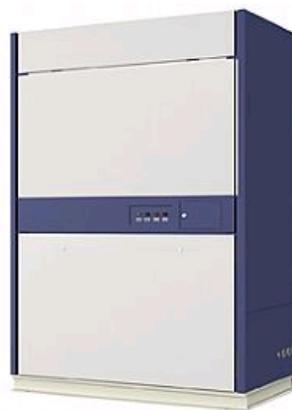

Pictures not to scale

## Product Details


PFD-P250VM-E	
Capacity (kW):	
Heating (Nominal)	31.5
Cooling (Nominal)	28.0
Heating (UK)	29.1
Cooling (UK)	26.6
SHF R410A (UK)	0.93
Power Input (kW) Heating (Nominal)	2.5
Power Input (kW) Cooling (Nominal)	2.5
Airflow(m <sup>3</sup> /min)	160
External Static Pressure Pa	120
Noise (dBA)	59
Pipe Size Gas mm (in)	22.2 (7/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Width - mm	1380
Depth - mm	780
Height - mm	1950
Weight - kg	380
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	47
Running Current (A) - Heating	4.9
Running Current (A) - Cooling	4.9
Fuse Rating (BS88) - HRC (A)	16

### Piping Restrictions

Total Piping Length (m)	165
Between Indoor and Outdoor Units - Height (m)	50

## Dimensions

PFD-P250VM-E

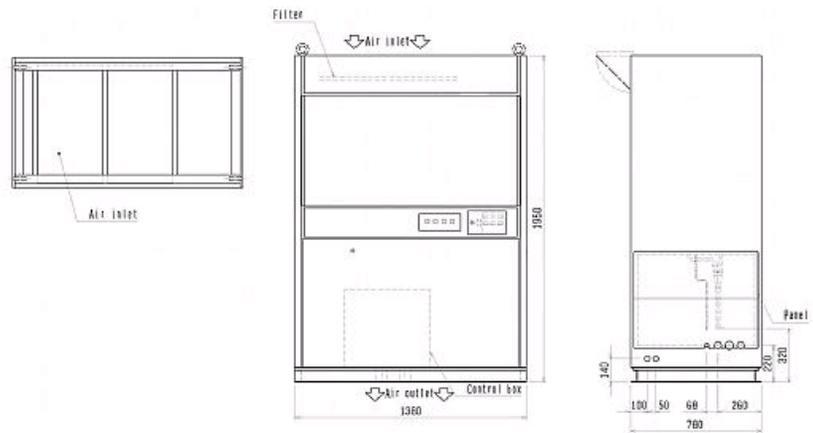

Telephone: 01707 282880

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:  
Fax:

