



PFFY-P32VLEM-E


Indoor Unit

Floor Standing Exposed



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

- **Remote controller can be incorporated into the main unit**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

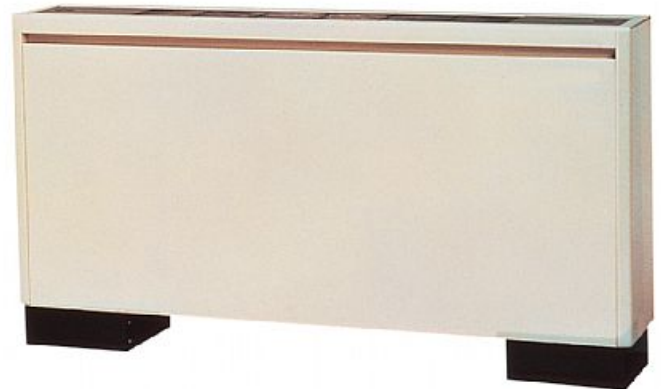

Pictures not to scale


Product Details

| PFFY-P32VLEM-E | |
|--------------------------------------|----------------|
| Capacity (kW): | |
| Heating (Nominal) | 4.0 |
| Cooling (Nominal) | 3.6 |
| R410A Heating (UK) | 3.7 |
| R407c Heating (UK) | 3.7 |
| R410A Cooling (UK) | 3.4 |
| R407c Cooling (UK) | 3.4 |
| R410A High Sensible Cooling (UK) | 2.6 |
| SHF R410A (UK) | 0.74 |
| SHF R407c (UK) | 0.74 |
| SHF High Sensible R410A (UK) | 0.81 |
| Power Input (kW) Heating (Nominal) | 0.06 |
| Power Input (kW) Cooling (Nominal) | 0.06 |
| Airflow(m ³ /min) - Lo-Hi | 7-9 |
| Noise (dBA) - Lo-Hi | 35-40 |
| Width - mm | 1170 |
| Depth - mm | 220 |
| Height - mm | 630 |
| Weight - kg | 25 |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Mains Cable No. Cores | 3 |
| Running Current (A) - Heating | 0.29 |
| Running Current (A) - Cooling | 0.29 |
| Fuse Rating (BS88) - HRC (A) | 6 |


Dimensions

PFFY-P32VLEM-E


Upper View >



Front View >

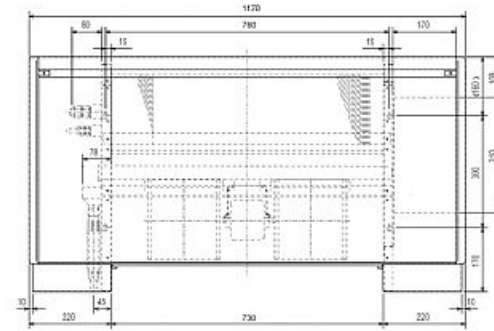

Side View >



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

