



# PLFY-P63VAM-E

Indoor Unit

2, 3 & 4 Way Blow Ceiling Cassette



Power cassettes offer 72 different airflow patterns, with the ability to handle a multitude of ceiling applications up to 4.2 meters in height. The easy to install unit is ideal for maintaining constant temperatures, thanks to adjustable vanes that allow users to precisely direct air where it's needed.

- **Handy corner pocket design simplifies maintenance**
- **Push-open grille for easier filter cleaning**
- **Individually directable vanes**
- **Airflow controllable for ceiling heights up to 4.2m**
- **Drain pump as standard, 850mm from drain pan**



Pictures not to scale


## Product Details

PLFY-P63VAM-E	
Capacity (kW):	
Heating (Nominal)	8.0
Cooling (Nominal)	7.1
R410A Heating (UK)	7.4
R407c Heating (UK)	7.4
R410A Cooling (UK)	6.7
R407c Cooling (UK)	6.7
R410A High Sensible Cooling (UK)	5.2
SHF R410A (UK)	0.75
SHF R407c (UK)	0.75
SHF High Sensible R410A (UK)	0.83
Power Input (kW) Heating (Nominal)	0.16
Power Input (kW) Cooling (Nominal)	0.16
Airflow (m <sup>3</sup> /min) - Lo-Mi1-Mi2-Hi	14-15-16-18
Noise (dBA) - Lo-Mi1-Mi2-Hi	28-29-31-33
Width (grille) - mm	840 (950)
Depth (grille) - mm	840 (950)
Height (grille) - mm	258 (30)
Weight (grille) - kg	24 (5)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.78
Running Current (A) - Cooling	0.78
Fuse Rating (BS88) - HRC (A)	6
Grille Ref	PLP-6AA


## Dimensions

PLFY-P63VAM-E

Lower View >

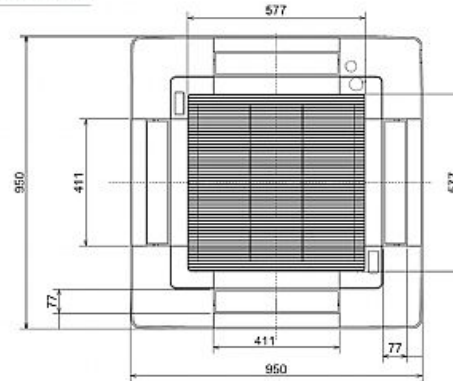

Side View >

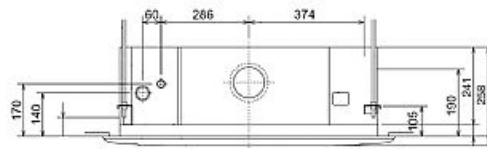

Telephone: 01707 282880

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:  
Fax:

