



PLFY-P32VCM-E

Indoor Unit

2x2 4-Way Blow Ceiling Cassette



The compact size of this unit is ideal for 600 by 600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- **Compact size for handy installation and easy maintenance**
- **Only 208mm high**
- **Fresh air duct facility**



Pictures not to scale


Product Details

| PLFY-P32VCM-E | |
|---|----------------|
| Capacity (kW): | |
| Heating (Nominal) | 4.0 |
| Cooling (Nominal) | 3.6 |
| R410A Heating (UK) | 3.7 |
| R407c Heating (UK) | 3.7 |
| R410A Cooling (UK) | 3.4 |
| R407c Cooling (UK) | 3.4 |
| R410A High Sensible Cooling (UK) | 2.6 |
| SHF R410A (UK) | 0.76 |
| SHF R407c (UK) | 0.76 |
| SHF High Sensible R410A (UK) | 0.85 |
| Power Input (kW) Heating (Nominal) | 0.06 |
| Power Input (kW) Cooling (Nominal) | 0.06 |
| Airflow(m ³ /min) - Lo-Mi-Hi | 8-9-11 |
| Noise (dBA) - Lo-Mi-Hi | 29-33-38 |
| Width (grille) - mm | 570 (650) |
| Depth (grille) - mm | 570 (650) |
| Height (grille) - mm | 208 (20) |
| Weight (grille) - kg | 17 (3) |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Mains Cable No. Cores | 3 |
| Running Current (A) - Heating | 0.28 |
| Running Current (A) - Cooling | 0.28 |
| Fuse Rating (BS88) - HRC (A) | 6 |
| Grille Ref | SLP-2AA |


Dimensions

PLFY-P32VCM-E

Lower View >

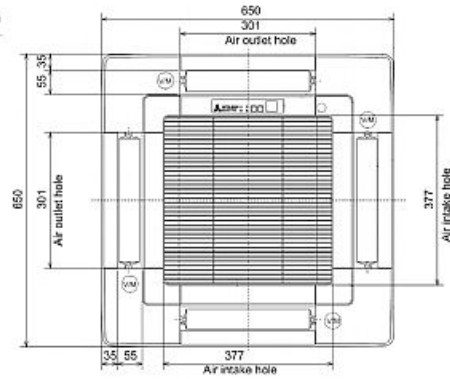

Side View >

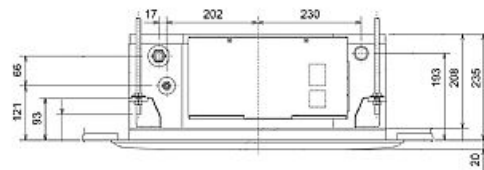

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

