

## PQHY-P400YSGM-A

WY Series 16hp Water Cooled Condensing Unit

R410A Heat Pump

The WY Series has all the benefits of the Y Series using water cooled condensing units. It is also able to produce heat recovery via the water circuit between heat source units, making for a very economical system.

- High COP's possible thanks to increased efficiency and careful control of the system, allowing the largest operational water circuit temperature band ever
- Combining WY with waste heat energy provides unique application solutions
- Condensing units can be situated indoors allowing greater design flexibility and no limitation on building size
- Single inverter compressor
- Improved pipe run of 150m with a total system pipe length of up to 300m
- High Sensible Cooling Function By raising the off coil temperature, a 10% increase in sensible cooling capacity over standard operation is achievable, the result being greater comfort for occupants
- Now able to operate with closed loop ground source water temperatures, bore hole and slinky applications are now possible



Pictures not to scale




## **Product Details**

| PQHY-P400YSGM-A                     |                |
|-------------------------------------|----------------|
| Capacity (kW):                      |                |
| Heating (Nominal)                   | 50.0           |
| Cooling (Nominal)                   | 45.0           |
| Power Input (kW) Heating (Nominal)  | 11.01          |
| Power Input (kW) Cooling (Nominal)  | 11.35          |
| Max No. of Connectable Indoor Units | 22             |
| Noise (dBA)                         | 50             |
| Width - mm                          | 1980           |
| Depth - mm                          | 550            |
| Height - mm                         | 1800           |
| Weight - kg                         | 208 + 244      |
| Electrical Supply                   | 380-415v, 50Hz |
| Phase                               | 3              |
| Mains Cable No. Cores               | 4 + earth      |
| Starting Current (A)                | 8              |
| Running Current (A) - Heating       | 17             |
| Running Current (A) - Cooling       | 17.5           |
| Fuse Rating (BS88) - HRC (A)        | 40             |
|                                     |                |

| Piping Restrictions                              |     |
|--|-----|
| Total Piping Length (m)                          | 300 |
| Furthest Piping Length (m)                       | 150 |
| Furthest Piping Length after 1st Branch (m)      | 40  |
| Between Indoor and Outdoor Units - Height<br>(m) | 50  |
| Between Indoor and Indoor Units - Height (m)     | 15  |

## Jimensions

PQHY-P400YSGM-A

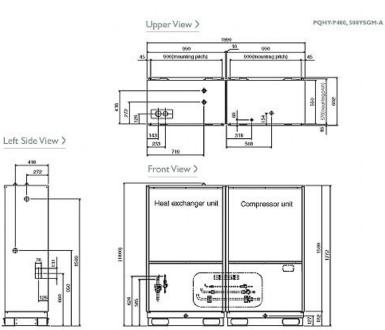



## Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



