Air Conditioning

Product Information

PUHY-P500YKB-A1 Heat Pump Outdoor Unit Making a World of Difference

CITYMULTI



The City Multi Y Series makes use of a two pipe refrigerant circuit throughout, with branch pipes feeding indoor units, allowing manual changeover from cooling to heating to ensure that a constant indoor climate is maintained.

Key Features

- Designed from day 1 for seasonal efficiency
- New energy-saving inverter driven compressor with very low start currents
- Reduced standby power by up to 50% using induction heated compressor
- By changing the system evaporating temperature, there are various options for indoor units to offer increased air off temperatures, higher SHF and improved comfort, with the benefit of energy saving
- A choice of standard reverse defrost or a continued supply of heating during the defrost cycle



Air Conditioning | Heating Ventilation | Controls




Product Information

Air Conditioning

PUHY-P500YKB-A1 Heat Pump Outdoor Unit Making a World of Difference


PUHY - OUTDOOR UNIT		PUHY-P500YKB-A1
CAPACITY (kW)	Heating (nominal)	63.0
	Cooling (nominal)	55.0
	High Performance Heating (UK)	57.0
	COP Priority Heating (UK)	54.8
	Cooling (UK)	49.9
POWER INPUT (kW) Heating (nominal)		18.52
	Cooling (nominal)	18.39
	High Performance Heating (UK)	21.11
	COP Priority Heating (UK)	17.96
	Cooling (UK)	11.86
COP / EER (nominal)		3.40 / 2.99
SCOP / SEER (system)		4.77 / 6.83
MAX No. OF CONNECTABLE INDOOR UNITS		43
MAX CONNECTABLE CAPACITY		50-130% OU Capacity
AIRFLOW (m ³ /min)	High	360
PIPE SIZE mm (in)	Gas	28.58 (1-1/8")
	Liquid	15.88 (5/8")
SOUND PRESSURE LEVEL (dBA)		66
SOUND POWER LEVEL (dBA)		86
WEIGHT (kg)		304
DIMENSIONS (mm)	Width	1750
	Depth	740
(1650mm without leg		1710
ELECTRICAL SUPPLY*		380-415v, 50Hz
PHASE*		Three
STARTING CURRENT (A)*		8 / 8
NOMINAL SYSTEM RUNNING CURRENT (A)*		29.7 / 29.4 [44.4]
Heating / Cooling [MAX]		
GUARANTEED OPERATING RANGE (°C)		-20~15.5 / -5~52
Heating / Cooling		
FUSE RATING (MCB sizes BS EN 60947-2) - (A)*		1 x 50
MAINS CABLE No. Cores*		4 + earth





Note: * A separate power supply is required for each module.



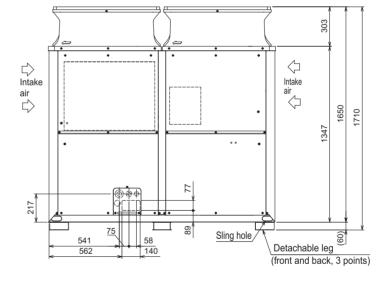



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Knapdom – Japan – Thaland – Malaysia. OMflusubile Electric Europe 2015. Mtsubish and Mtsubish Electric are trademarks of Mtsubish Electric Europe BV. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mtsubish Electric is constantived (developing and improving its products. Al descriptions, literations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a coory of which is available on request. Third-party product and brand nemes may be trademarks or their respective owners.



Mitsubishi Electric UK's commitment to the environment



You mitsubishielectric2

