## Air Conditioning

#### **Product Information**

PUMY-P140VKM2
Heat Pump Outdoor Unit

Making a World of Difference

CITYMULTI



The PUMY City Multi model allows up to 9 indoor units to be connected to a single outdoor unit, using the standard branch pipework system proven in the larger models. Utilising the latest Mitsubishi Electric inverter technology, the system is fully controllable with all City Multi controllers or linked to third party BEMS.

#### **Key Features**

- Improved seasonal efficiency through new HIC circuit, increased heat exchanger surface area and improved fan shape
- Latest in inverter technology including a highly efficient DC Scroll Compressor, DC fan motor and Demand Control
- New AC pre-heating control reduces standby power input
- The condensing unit is extremely slimline which allows easy location and application of the system
- Anti-Corrosion blue and flat fin technology
- Connect stylish M Series wall mounted and floor mounted indoor units to the system via the LEV kit interface (PAC-LV11)
- Connect M Series and Mr Slim indoor units via the PAC-MK-BC boxes alongside VRF indoor units to the same system to provide a multi-split solution



Air Conditioning | Heating Ventilation | Controls



## **Product Information**


## PUMY-P140VKM2 Heat Pump Outdoor Unit


Making a World of Difference

# Air Conditioning

PUMY - OUTDOOR UNIT		PUMY-P140VKM2
CAPACITY (kW)	Heating (nominal)	18.0
0,11,10111 (1111)	Cooling (nominal)	15.5
	Heating (UK)	14.9
	Cooling (UK)	14.3
POWER INPUT (kW)	Heating (nominal)	4.47
1 OVVETTING OT (KVV)	Cooling (nominal)	4.52
	Heating (UK)	3.98
	Cooling (UK)	3.03
COP / EER (nominal)	Occiling (Or y	4.03 / 3.43
SCOP / SEER (system)		3.61 / 5.60
Max no. OF CONNECTABLE INDOOR UNITS		12
MAX CONNECTABLE CAPACITY		50-130% OU Capacity
AIRFLOW (m³/min)		110
PIPE SIZE mm (in)	Gas	15.88 (5/8")
. ,	Liquid	9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)		51
WEIGHT (kg)		123
DIMENSIONS (mm)	Width	1050
	Depth	330+30
	Height	1338
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
STARTING CURRENT (A)		5
NOMINAL SYSTEM RUNNING CURRENT (A)*		19.73 / 19.95 [29.5]
Heating / Cooling [MAX]		
GUARANTEED OPERATING RANGE (°C) Heating / Cooling		-20~15 / -5~46
FUSE RATING (BS88) - HRC (A)		1 x 32
MAINS CABLE No. Cores		3

	1050 362	
1338	Service panel	

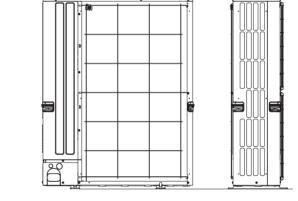

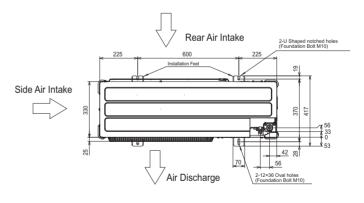





Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland










Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)





Mitsubishi Electric UK's commitment





