

# **MSC-GA35VB**

Heat Pump R410A Classic Wall Mounted System

Mitsubishi Electric's new range of high specification, flat panel wall mounted models make use of traditional fixed speed technology, whilst providing extremely good value for money, costing approximately 30% less than the inverter equivalent. These units have extremely quiet sound levels, whilst also delivering economical air conditioning, with improved COP/EER figures. Ideal for use in any size room, this unit comes equipped with an automatic swing vane, allowing airflow to be extended to every corner of a room.

### Air Cleaning Filter is optional





Pictures not to scale


#### **Product Details**

MSC-GA35VB Indoor Unit	
Capacity (kW):	
Heating (Nominal)	3.7
Cooling (Nominal)	3.5
Heating (UK)	3.05
Cooling (UK)	3.45
SHF R410A (Nominal)	0.66
COP / EER (Nominal)	3.63 / 3.21
Energy Label Heating / Cooling	A / A
Width - mm	815
Depth - mm	244
Height - mm	278
Weight - kg	9
Airflow (m3/min) (Heating /Cooling) - Lo-Mi-Hi	6.6-8.3-10.1 /5.4-7.4- 9.7
Noise (dBA) (Heating /Cooling) - Lo-Mi-Hi	26-33-39 /26-33-40
Pipe Size Gas mm (in)	9.52 (3/8)
Pipe Size Liquid mm (in)	6.35 (1/4)
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Power Input (kW) - Heating (Nominal)	0.04
Power Input (kW) - Cooling (Nominal)	0.04
Power Input (kW) - Heating (UK)	0.04
Power Input (kW) - Cooling (UK)	0.04
Running Current (A) - Heating / Cooling	0.19/0.19
Interconnecting Cable No. Cores	2 Core 12v


## Dimensions


MSC-GA35VB

Upper View >










Side View >

#### MUH-GA35VB

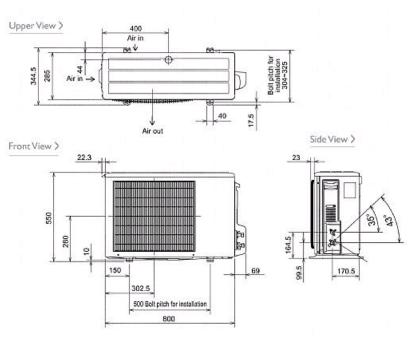

## MUH-GA35VB Outdoor Unit

Width - mm	800
Depth - mm	285
Height - mm	550
Weight - kg	35
Noise (dBA) (Heating /Cooling) - Lo-Mi-Hi	26-33-39/26-33-40
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	16
Power Input (kW) - Heating (Nominal)	0.98
Power Input (kW) - Cooling (Nominal)	1.05
Power Input (kW) - Heating (UK)	0.888
Power Input (kW) - Cooling (UK)	0.832
Starting Current (A)	27
Running Current (A) - Heating / Cooling	4.34 / 4.65
Mains Cable No. Cores	3
Max Pipe Length (m)	25
Max Height Difference (m)	10
Charge (kg) - 7m	0.8



#### Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



Tel:

Fax: