# Air Conditioning

## **Product Information**

MSZ-EF25VE2 B/S/W Zen Inverter Heat Pump Wall Mounted System Making a World of Difference

Mseries



The Zen Series is a wall mounted system that blends energy efficiency with a sophisticated, streamlined design.

#### **Key Features**

- New stylish design
- Energy efficient operation
- Quiet operation recognised by the Noise Abatement Society for industry leading low noise levels
- Weekly Timer
- Nano Platinum filter
- Replace Technology available
- Multi-Split compatibility
- Compatible with City Multi when used in conjuction with PAC-LV11M LEV kit



Air Conditioning | Heating Ventilation | Controls






## Air Conditioning

## **Product Information**

MSZ-EF25VE2 B/S/W **Zen Inverter Heat Pump** Wall Mounted System

Making a World of Difference

MSZ-EF B/S/	W - INDOOR UNIT	MSZ-EF25VE2 B/S/W
CAPACITY (kW)	Heating (nominal)	3.2 (1.1-4.2)
	Cooling (nominal)	2.5 (1.2-3.4)
	Heating (UK)	2.65 (0.91-3.49)
	Cooling (UK)	2.48 (1.19-3.37)
SHF (nominal & UK)		0.92
COP / EER (nominal)		4.57 / 4.59
SCOP / SEER (BS EN14825)		4.7 / 8.5
ErP ENERGY EFFICIENCY CLASS Heating/Cooling		A++ / A+++
AIRFLOW (I/s)	Heating/Cooling - Lo-Mi-Hi-SupHi	67-77-103-148-198 / 67-77-105-138-175
PIPE SIZE mm (in)	Gas	9.52 (3/8")
	Liquid	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA) Heating/Cooling - Lo-Mi-Hi-SupHi		21-24-29-37-45 / 21-23-29-36-42
SOUND POWER LEVEL (dBA)		60
DIMENSIONS (mm)	Width x Depth x Height	885 x 195 x 299
WEIGHT (kg)		11.5
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. CORES		4

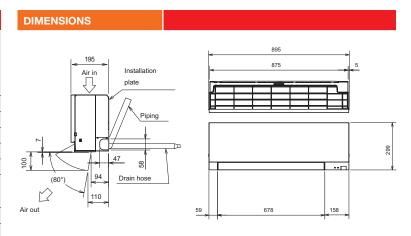

MUZ-EF B/S/W - OUTDOOR UNIT	MUZ-EF25VE
SOUND PRESSURE LEVEL (dBA) Heating/Cooling	48 / 47
SOUND POWER LEVEL (dBA) Cooling	58
WEIGHT (kg)	30
DIMENSIONS (mm) Width x Depth x Height	800 x 285 x 550
ELECTRICAL SUPPLY	220-240v, 50Hz
PHASE	Single
SYSTEM POWER INPUT (kW) Heating/Cooling (nominal)	0.700 / 0.545
Heating/Cooling (UK)	0.64 / 0.44
STARTING CURRENT (A)	3.5
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]	3.5 / 2.9 [7.3]
FUSE RATING (BS88) - HRC (A)	10
MAINS CABLE No. CORES	3
MAX PIPE LENGTH (m)	20
MAX HEIGHT DIFFERENCE (m)	12
CHARGE R410A (kg) - 7m	0.8











Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)


Country of origin: United Kingdom – Japan – Thalland – Malaysia. @Mitsubish liBictric Europe 2015. Mitsubish and Mitsubish Electric are trademarks of Mitsubish Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public amountement. Mitsubish Electric is constantly developing and improving its products. All descriptions, listilations, dawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on nequest. Third-party product and brand enness may be trademarks or registered trademarks of their respective owners.













Mitsubishi Electric UK's commitment to the environment





