

Air Conditioning

Product Information

MSZ-GF60VE : Inverter Heat Pump

R410A Wall Mounted System



The MSZ series has been completely redesigned and features the Nano Platinum filter system.

These models offer industry leading noise levels and have a distinctively styled front panel that not only looks appealing, but also helps to make cleaning of the unit easier.

FEATURES



INDOOR


Heating Capacity (kW) (nominal)	6.8 (2 - 9.3)
Cooling Capacity (kW) (nominal)	6 (1.4 - 7.5)
Heating Capacity (kW) (UK)	5.65 (1.66 - 7.73)
Cooling Capacity (kW) (UK)	6.05 (1.38 - 7.73)
SHF (nominal and UK)	0.79
COP / EER (nominal)	3.76 / 3.41
SCOP / SEER	4.3 / 6.8
Energy Efficiency Class - Heating / Cooling	A+ / A++
Airflow (m³/min) (Heating) - Si-Lo-Mi-Hi-SupHi	9.8 - 11.3 - 13.4 - 15.6 - 18.3
Airflow (m³/min) (Cooling) - Si-Lo-Mi-Hi-SupHi	9.8 - 11.3 - 13.4 - 15.6 - 18.3
Pipe Size Gas (mm [in])	15.88 (5/8)
Pipe Size Liquid (mm [in])	6.35 (1/4)
Sound Pressure Level (dBA) Heating - Si-Lo-Mi-Hi-SupHi	29 - 37 - 41 - 45 - 49
Sound Pressure Level (dBA) Cooling - Si-Lo-Mi-Hi-SupHi	29 - 37 - 41 - 45 - 49
Sound Power Level (dBA) Cooling	65
Dimensions (mm) Width x Depth x Height	1100 x 238 x 325
Weight (kg)	16
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 55
Sound Power Level (dBA) Cooling	65
Weight (kg)	50
Dimensions (mm) Width x Depth x Height	840 x 330 x 880
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	1.81 / 1.79
System Power Input (kW) - Heating / Cooling (UK)	1.65 / 1.45
Starting Current (A)	8
System Running Current (A) [MAX] - Heating / Cooling	8 / 7.9 [14.5]
Fuse Rating (BS88) - HRC (A)	20
Mains Cable No. Cores	3
Max Pipe Length (m)	30
Max Height Difference (m)	15
Charge R410A (kg) - (pre charged length)	1.55 (7)

DIMENSIONS

MSZ-GF

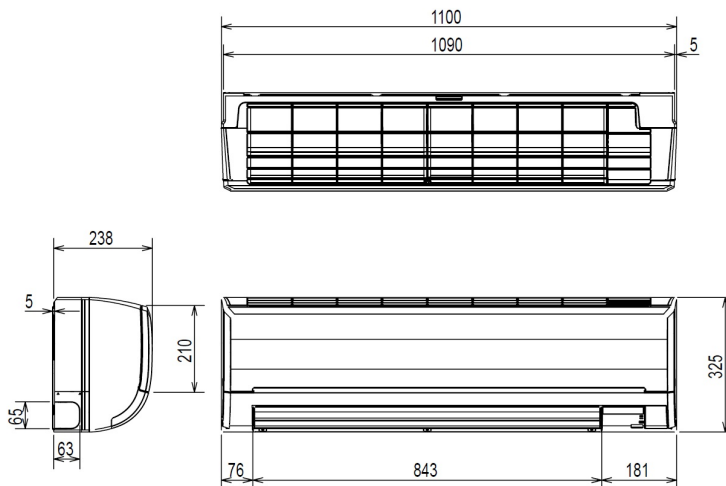

DIMENSIONS

MUZ-GF

