

Air Conditioning

Product Information

MSZ-GF71VE : Inverter Heat Pump

R410A Wall Mounted System



The MSZ series has been completely redesigned and features the Nano Platinum filter system.

These models offer industry leading noise levels and have a distinctively styled front panel that not only looks appealing, but also helps to make cleaning of the unit easier.

FEATURES



INDOOR

Heating Capacity (kW) (nominal)	8.1 (2.2 - 9.9)
Cooling Capacity (kW) (nominal)	7.1 (2 - 8.7)
Heating Capacity (kW) (UK)	6.73 (1.83 - 8.23)
Cooling Capacity (kW) (UK)	7 (1.98 - 8.63)
SHF (nominal and UK)	0.78
COP / EER (nominal)	3.63 / 3.33
SCOP / SEER	4.2 / 6.8
Energy Efficiency Class - Heating / Cooling	A+ / A++
Airflow (m³/min) (Heating) - Si-Lo-Mi-Hi-SupHi	10.2 - 11.5 - 13.3 - 15.4 - 17.8
Airflow (m³/min) (Cooling) - Si-Lo-Mi-Hi-SupHi	9.7 - 11.5 - 13.3 - 15.4 - 17.8


Pipe Size Gas (mm [in])	15.88 (5/8)
Pipe Size Liquid (mm [in])	9.52 (3/8)
Sound Pressure Level (dBA) Heating - Si-Lo-Mi-Hi-SupHi	30 - 37 - 41 - 45 - 49
Sound Pressure Level (dBA) Cooling - Si-Lo-Mi-Hi-SupHi	30 - 37 - 41 - 45 - 49
Sound Power Level (dBA) Cooling	65
Dimensions (mm) Width x Depth x Height	1100 x 238 x 325
Weight (kg)	16
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 55
Sound Power Level (dBA) Cooling	65
Weight (kg)	53
Dimensions (mm) Width x Depth x Height	840 x 330 x 880
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	2.23 / 2.13
System Power Input (kW) - Heating / Cooling (UK)	2.03 / 1.73
Starting Current (A)	9.8
System Running Current (A) [MAX] - Heating / Cooling	9.8 / 9.3 [16.6]
Fuse Rating (BS88) - HRC (A)	20
Mains Cable No. Cores	3
Max Pipe Length (m)	30
Max Height Difference (m)	15
Charge R410A (kg) - (pre charged length)	1.9 (7)

DIMENSIONS

MSZ-GF

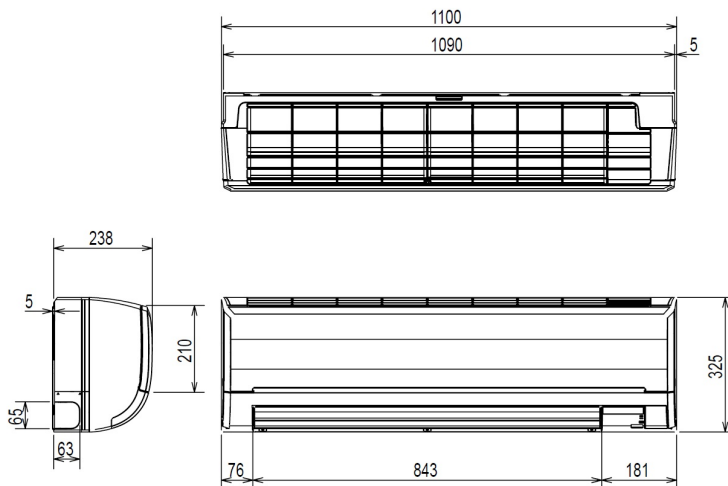

DIMENSIONS

MUZ-GF

