Air Conditioning

Product Information

MSZ-HJ35VA Inverter Heat Pump Classic Wall Mounted System Making a World of Difference

M series



Mitsubishi Electric's range of classic, flat panel wall mounted models make use of inverter technology, whilst providing extremely good value for money, costing approximately 20% less than the MSZ-SF equivalent.

Key Features

- Swing Vane Mode with Auto Vane Shutter
- Infra-red remote controller
- Econo Cool allows set temperature to be raised by 2°C without any loss of comfort and a 20% gain in energy efficiency
- Auto-Restart
- Quiet operation
- Optional Catechin filter improves air quality and prevents the spread of bacteria and viruses within the room
- Replace Technology available



Air Conditioning | Heating Ventilation | Controls



Product Information


MSZ-HJ35VA Inverter Heat Pump Classic Wall Mounted System

Making a World of Difference

Air Conditioning

MSZ-HJ - INDOOR UNIT		MSZ-HJ35VA
CAPACITY (kW)	Heating (nominal)	3.6 (0.9-4.8)
	Cooling (nominal)	3.15 (1.0-3.7)
	Heating (UK)	2.99 (0.74-3.98)
	Cooling (UK)	3.12 (0.99-3.67)
SHF (nominal & UK)		0.87
COP / EER (nominal)		3.62 / 3.03
SCOP / SEER (BS EN14825)		3.8 / 5.1
ErP ENERGY EFFICIENCY CLASS Heating/Cooling		A/B
AIRFLOW (I/s)	Heating/Cooling - Lo-Mi-Hi-SupHi	57-92-125-172 / 63-95-130-18
PIPE SIZE mm (in)	Gas	9.52 (3/8")
	Liquid	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA) Heating/Cooling - Lo-Mi-Hi-SupHi		23-30-37-44 / 22-31-37-45
SOUND POWER LEVEL (dBA)		60
DIMENSIONS (mm)	Width x Depth x Height	799 x 232 x 290
WEIGHT (kg)		9
ELECTRICAL SUPPLY		220-240v, 50Hz
FUSE RATING (BS88) - HRC (A)		10
INTERCONNECTING CABLE No. CORES		4

MUZ-HJ - OUTDOOR UNI	Γ MUZ-HJ35VA
SOUND PRESSURE LEVEL (dBA) Heatin	g/Cooling 50 / 50
SOUND POWER LEVEL (dBA) Coolin	ng 64
WEIGHT (kg)	25
DIMENSIONS (mm) Width x Depth :	Height 699 x 249 x 530
ELECTRICAL SUPPLY	Fed by Indoor Unit
PHASE	Single
SYSTEM POWER INPUT (kW) Heating/Cooling	g (nominal) 0.995 / 1.040
Heating/Coolin	g (UK) 0.90 / 0.83
STARTING CURRENT (A)	4.9
SYSTEM RUNNING CURRENT (A) Heating/Coo	ling [MAX] 4.8 / 4.9 [6.5]
FUSE RATING (BS88) - HRC (A)	10
MAINS CABLE No. CORES	3
MAX PIPE LENGTH (m)	20
MAX HEIGHT DIFFERENCE (m)	12
CHARGE R410A (kg) - 7m	0.72

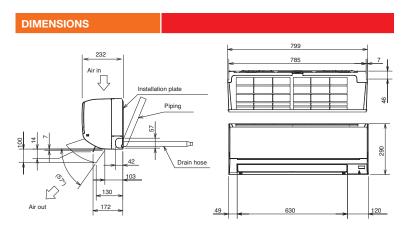







Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Bectric Europe 2015. Mitsubishi and Mitsubishi Bectric are trademarks of Mitsubish Bectric Europe B.V. The company reserves the alea any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing viring its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to pany's General Conditions of Sale, a copy of which is available on request. Third-party product and brand mems may be trademarks or registered trademarks of their respective owners.










Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)





Mitsubishi Electric UK's commitment to the environment





