



PCA-RP Power Inverter Heat Pump

R410A Ceiling Suspended System

New Series

- > Split system comprising of ceiling suspended indoor unit, outdoor unit and wall mounted control panel
- > Indoor unit designed for direct ceiling suspension
- > Flush to wall installation for concealment of service connections
- > Electronic control includes learning defrost, fault finding diagnostics, low ambient fan speed control and anti-phase/single phase protection

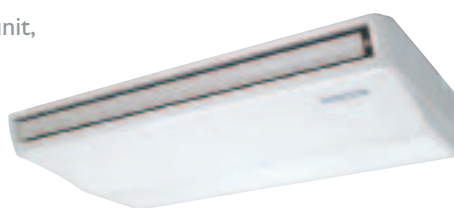


Technical Information >>

PCA-RP - INDOOR UNITS							
MODEL REFERENCE		PCA-RP2GA	PCA-RP2.5GA	PCA-RP3GA	PCA-RP4GA	PCA-RP5GA	PCA-RP6GA
CAPACITY (kW)	Heating (nominal)	5.5 (2.5-6.6)	7.0 (2.8-8.2)	8.0 (3.5-10.2)	11.2 (4.5-14.0)	14.0 (5.0-16.0)	16.0 (5.0-18.0)
	Cooling (nominal)	4.7 (2.3-5.4)	6.0 (2.7-6.7)	7.1 (3.3-8.1)	10.0 (4.9-11.4)	12.5 (5.5-14.0)	14.0 (5.5-15.3)
	Heating (UK)	4.7 (2.15-5.6)	5.95 (2.4-6.95)	6.8 (3.0-8.65)	9.5 (3.85-11.9)	11.9 (4.25-13.6)	13.6 (4.25-15.3)
	Cooling (UK)	4.25 (2.05-4.85)	5.4 (2.45-6.05)	6.4 (2.95-7.3)	9.0 (4.4-10.25)	11.25 (4.95-12.6)	12.6 (4.95-13.75)
SHF (nominal)		0.76	0.81	0.74	0.75	0.77	0.74
COP / EER (nominal)		3.22 / 2.81	3.45 / 3.68	3.29 / 3.31	3.44 / 3.42	3.23 / 3.21	3.48 / 2.82
ENERGY LABEL	Heating/Cooling	C / C	B / A	C / A	B / A	C / A	B / C
AIRFLOW (m3/min)		Lo-Mi1-Mi2-Hi	10-11-12-13	14-15-16-18	20-21-23-25	27-30-32-34	27-30-32-34
PIPE SIZE mm(in)	Gas	12.7 (1/2")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
	Liquid	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
NOISE (dBA)		Lo-Mi1-Mi2-Hi	37-38-40-42	37-39-41-43	40-41-43-45	41-43-45-46	42-44-46-48
DIMENSIONS (mm)	Width	1000	1310	1310	1310	1620	1620
	Depth	680	680	680	680	680	680
	Height	210	210	210	270	270	270
WEIGHT (kg)		27	34	34	37	43	45
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
PHASE		Single	Single	Single	Single	Single	Single
FUSE RATING (BS88) – HRC (A)		6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4

PUHZ-RP - OUTDOOR UNITS							
MODEL REFERENCE		PUHZ-RP2VHA	PUHZ-RP2.5VHA	PUHZ-RP3VHA	PUHZ-RP4VHA	PUHZ-RP5VHA	PUHZ-RP6VHA
NOISE (dBA)		Heating/Cooling	46 / 44	48 / 47	48 / 47	51 / 49	52 / 50
WEIGHT (kg)			45	75	75	121	121
DIMENSIONS (mm)	Width		800	950	950	950	950
	Depth		330 + 23	330 + 30	330 + 30	330 + 30	330 + 30
	Height		600	943	943	1350	1350
ELECTRICAL SUPPLY			220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE			Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)		1.71 / 1.67	2.03 / 1.63	2.43 / 2.14	3.26 / 2.92	4.34 / 3.89
	Heating/Cooling (UK)		1.52 / 1.42	1.81 / 1.39	2.16 / 1.82	2.90 / 2.48	3.86 / 3.31
STARTING CURRENT (A)			5	5	5	5	5
SYSTEM RUNNING CURRENT (A) Heating/Cooling			6.88 / 6.57	8.03 / 7.14	10.27 / 8.57	14.63 / 13.02	18.51 / 16.81
FUSE RATING (BS88) – HRC (A)			16	25	25	32	32
MAINS CABLE No. Cores			3	3	3	3	3
MAX PIPE LENGTH (m)			50	50	50	75	75
MAX HEIGHT DIFFERENCE (m)			30	30	30	30	30
CHARGE R410A (kg) - 30m			2.5	3.5	3.5	5.0	5.0


PCA-RP Power Inverter Heat Pump

Side View >

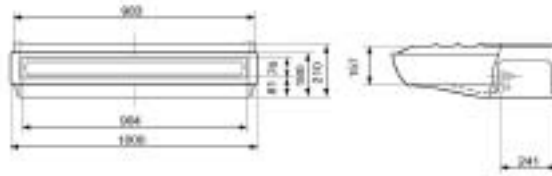


Mr Slim Range 2004

Side View >

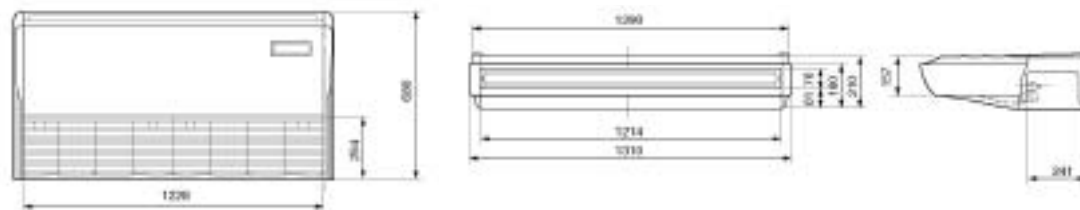

PCA-RP Power Inverter Heat Pump

Side View >

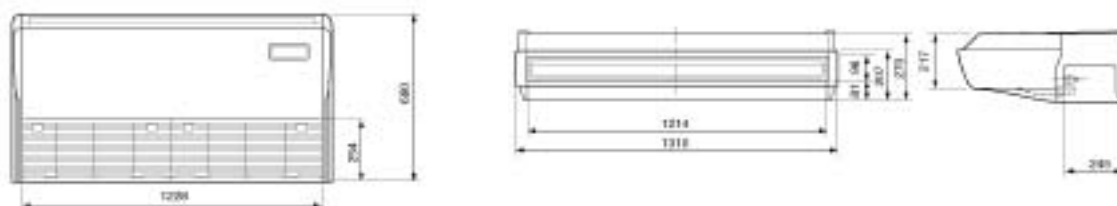

PCA-RP Power Inverter Heat Pump

Side View >

