



PCA-RP125GA

Standard Inverter Heat Pump

R410A Ceiling Suspended System

The new Standard Inverter range provides inverter solutions for customers who want all the benefits that inverters offer, but do not have the budget available for the more expensive Power Inverter range.

- **Indoor unit designed for direct ceiling suspension**
- **Flush to wall installation for concealment of service connections**
- **Electronic control includes learning defrost, fault finding diagnostics, low ambient fan speed control and anti-phase/single phase protection**



Pictures not to scale

Product Details

PCA-RP125GA Indoor Unit


Capacity (kW):	
Heating (Nominal) (Low - High)	14.00 (5.00 - 16.00)
Cooling (Nominal) (Low - High)	12.30 (5.50 - 14.00)
Heating (UK) (Low - High)	11.90 (4.25 - 13.60)
Cooling (UK) (Low - High)	11.05 (4.95 - 12.60)
SHF R410A (Nominal)	0.78
COP / EER (Nominal)	2.81 / 2.81
Energy Label Heating / Cooling	D / C
Width - mm	1620
Depth - mm	680
Height - mm	270
Weight - kg	43
Airflow (m ³ /min) - Lo-Mi1-Mi2-Hi	27-30-32-34
Noise (dBA) - Lo-Mi1-Mi2-Hi	41-43-45-46
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Remote Controller Ref	PAR-21MAA

PUHZ-P125VHA Outdoor Unit


Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	123
Noise (dBA) (Heating / Cooling)	55 / 51
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	32
System Power Input (kW) - Heating (Nominal)	4.98
System Power Input (kW) - Cooling (Nominal)	4.38
System Power Input (kW) - Heating (UK)	4.43
System Power Input (kW) - Cooling (UK)	3.72
Starting Current (A)	14
System Running Current (A) - Heating / Cooling	17.75 / 18.38
Mains Cable No. Cores	3
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge (kg) - 30m	4.5

Dimensions

PCA-RP125GA

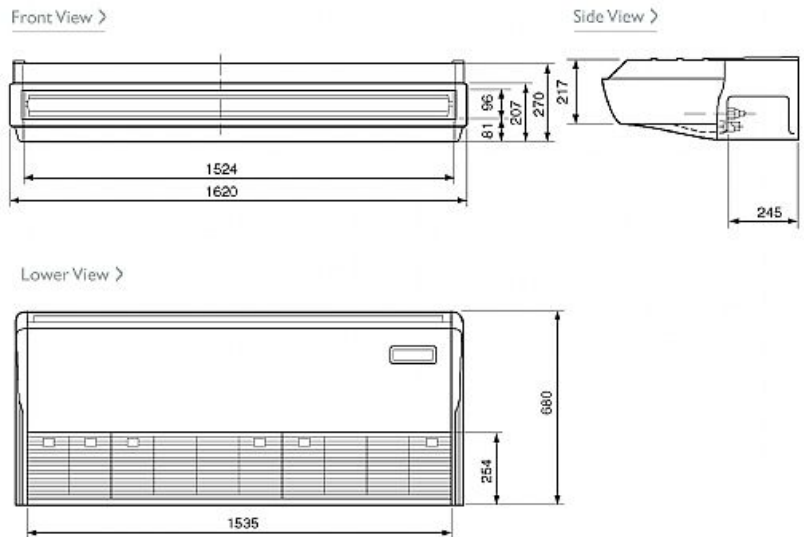

PUHZ-P125VHA

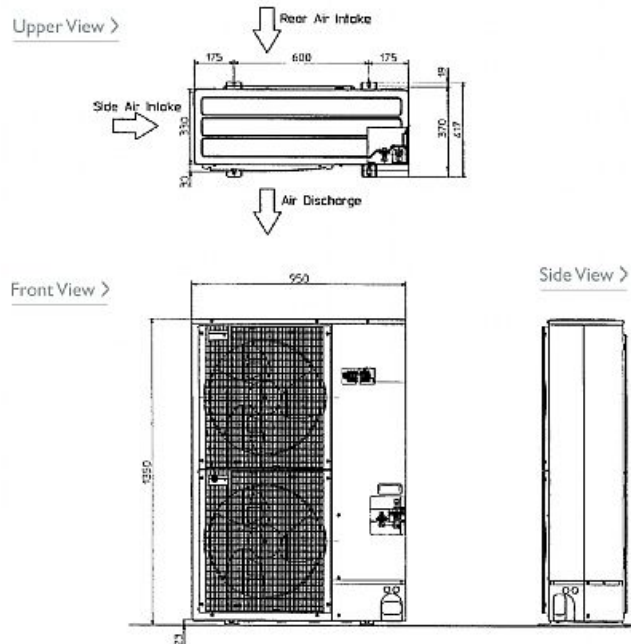

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Tel:
Fax:

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

