



PCA-RP140GA

Power Inverter Heat Pump

R410A Ceiling Suspended System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Electronic control includes learning defrost, fault finding diagnostics, low ambiet fan speed control and antiphase/single phase protection







Pictures not to scale

Product Details

PCA-RP140GA Indoor Unit	
Capacity (kW):	
Heating (Nominal) (Low - High)	16.00 (5.00 - 18.00)
Cooling (Nominal) (Low - High)	14.00 (5.50 - 15.30)
Heating (UK) (Low - High)	13.60 (4.25 - 15.30)
Cooling (UK) (Low - High)	12.60 (4.95 - 13.75)
SHF R410A (Nominal)	0.75
COP / EER (Nominal)	3.48 / 3.01
Energy Label Heating / Cooling	B/B
Width - mm	1620
Depth - mm	680
Height - mm	270
Weight - kg	45
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	27-30-32-34
Noise (dBA) - Lo-Mi1-Mi2-Hi	42-44-46-48
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Remote Controller Ref	PAR-21MAA

PUHZ-RP140VHA2 Outdoor Unit

Noise (dBA) (Heating / Cooling)

Fuse Rating (BS88) - HRC (A)

System Power Input (kW) - Heating (Nominal)

System Power Input (kW) - Cooling (Nominal)

System Power Input (kW) - Heating (UK)

System Power Input (kW) - Cooling (UK)

System Running Current (A) - Heating /

Width - mm

Depth - mm

Height - mm

Weight - kg

Phase

Cooling

Electrical Supply

Starting Current (A)

Mains Cable No. Cores


Max Height Difference (m)

Max Pipe Length (m)


Charge (kg) - 30m

Dimensions

PCA-RP140GA

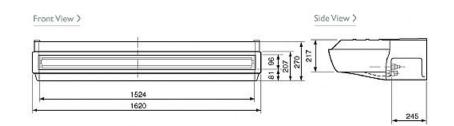

Lower View >



PUHZ-RP140VHA2

950

1350

116

52/50 220-240v, 50Hz

Single

40

4.6

4.65

4.09

3.95

20.93 / 20.66

5


3

75

30

5

330 + 30



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.





Tel: Fax: