



PCA-RP140GA

Heat Pump

R410A Ceiling Suspended System

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Electronic control includes learning defrost, fault finding diagnostics, low ambient fan speed control and anti-phase/single phase protection



Pictures not to scale

Product Details

PCA-RP140GA Indoor Unit


Capacity (kW):	
Heating (Nominal)	17.00
Cooling (Nominal)	14.20
Heating (UK)	14.45
Cooling (UK)	12.80
SHF R410A (Nominal)	0.75
Width - mm	1620
Depth - mm	680
Height - mm	270
Weight - kg	45
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	27-30-32-34
Noise (dBA) - Lo-Mi1-Mi2-Hi	42-44-46-48
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Remote Controller Ref	PAR-21MAA

PUH-P140YHA Outdoor Unit


Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	131
Noise (dBA) (Heating /Cooling)	53 /51
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	25
SystemPower Input (kW) - Heating (Nominal)	5.22
SystemPower Input (kW) - Cooling (Nominal)	5.44
SystemPower Input (kW) - Heating (UK)	4.65
SystemPower Input (kW) - Cooling (UK)	4.62
Starting Current (A)	85
SystemRunning Current (A) - Heating / Cooling	9.46 / 9.56
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	50
Charge (kg) - 30m	5

Dimensions

PCA-RP140GA

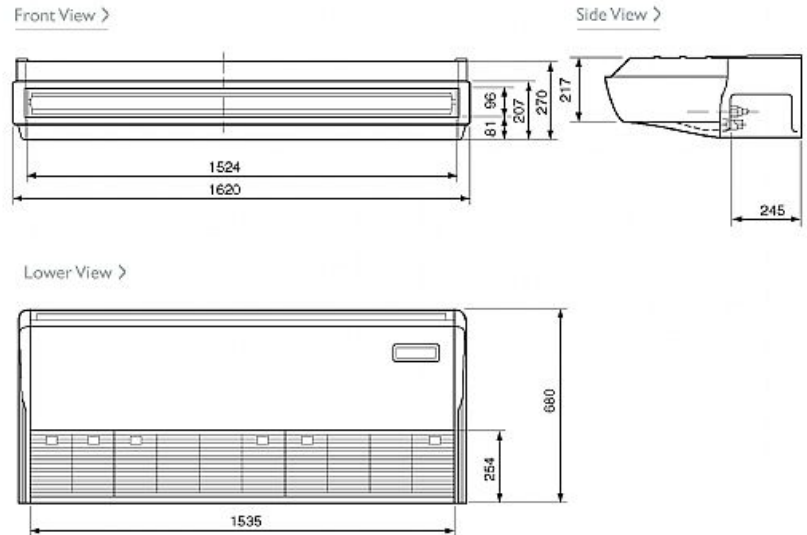

PUH-P140YHA

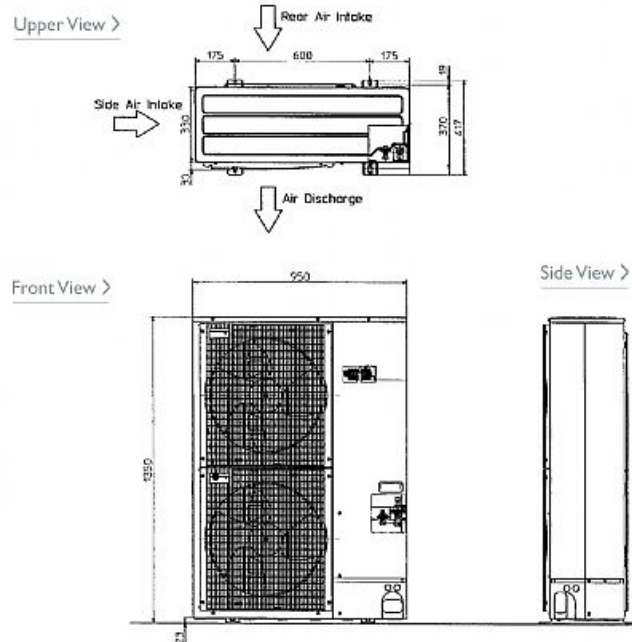

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

