



PEH-RP200MYA

Heat Pump

R407c Large Capacity Ceiling Concealed Ducted System

- Twin, triple or quadruple configurations on one outdoor unit, utilising Mr Slim indoor units
- Static pressure of up to 150Pa



Pictures not to scale

Product Details

PEH-RP200MYA Indoor Unit


Capacity (kW):	
Heating (Nominal)	23.7
Cooling (Nominal)	20.9
Heating (UK)	20.15
Cooling (UK)	18.8
SHF R407c (Nominal)	0.73
Width - mm	1380
Depth - mm	650
Height - mm	428
Weight - kg	70
External Static Pressure Pa - Lo-Hi	50-150
Noise (dBA)	49
Pipe Size Gas mm (in)	28.58 (1 1/8)
Pipe Size Liquid mm (in)	12.7 (1/2)
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	6
Power Input (kW) - Heating (Nominal)	0.65
Power Input (kW) - Cooling (Nominal)	0.65
Power Input (kW) - Heating (UK)	0.58
Power Input (kW) - Cooling (UK)	0.58
Starting Current (A)	5
Running Current (A) - Heating / Cooling	1.12 / 1.12
Interconnecting Cable No. Cores	3
Mains Cable No. Cores	5
Remote Controller Ref	PAR-21MAA

PUH-P200MYA Outdoor Unit


Width - mm	990
Depth - mm	840
Height - mm	1715
Weight - kg	215
Noise (dBA)	56
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	32
Power Input (kW) - Heating (Nominal)	7.17
Power Input (kW) - Cooling (Nominal)	7.27
Power Input (kW) - Heating (UK)	6.38
Power Input (kW) - Cooling (UK)	6.18
Starting Current (A)	109
Running Current (A) - Heating / Cooling	12.8 / 13
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	40
Charge (kg)	6

Dimensions

PEH-RP200MYA

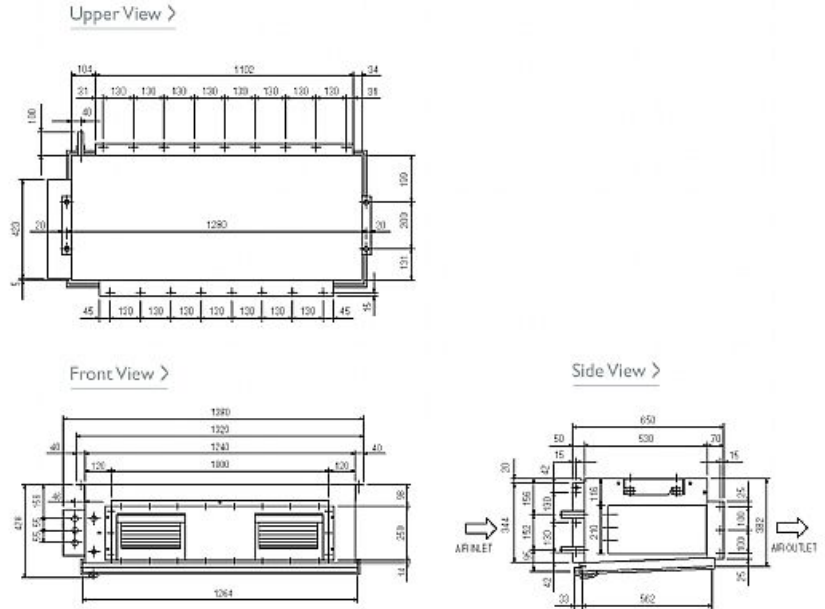

PUH-P200MYA

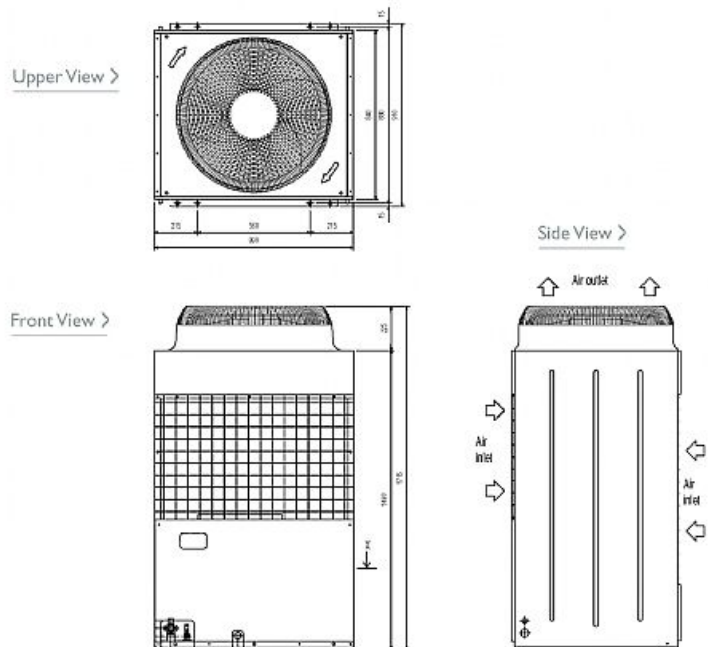

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

