







# **PKA-RP100FAL**

Power Inverter Heat Pump R410A Wall Mounted System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- Adjustable louvres for uniform air distribution
- Internal pipe connection to wall mounted unit for easy and neat installation







Pictures not to scale


# Product Details

PKA-RP100FAL Indoor Unit	
Capacity (kW):	
Heating (Nominal) (Low - High)	11.20 (4.50 - 14.00)
Cooling (Nominal) (Low - High)	10.00 (4.90 - 11.40)
Heating (UK) (Low - High)	9.50 (3.85 - 11.90)
Cooling (UK) (Low - High)	9.00 (4.40 - 10.25)
SHF R410A (Nominal)	0.77
COP / EER (Nominal)	3.45 / 3.41
Energy Label Heating / Cooling	B/A
Width - mm	1680
Depth - mm	235
Height - mm	340
Weight - kg	28
Airflow (m3/min) - Lo-Hi	22-28
Noise (dBA) - Lo-Hi	41-46
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4


PUHZ-RP100YHA3 Outdoor Unit	
Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	130
Noise (dBA) (Heating /Cooling)	51 /49
Electrical Supply	380-415v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	16
SystemPower Input (kW) - Heating (Nominal)	3.25
SystemPower Input (kW) - Cooling (Nominal)	2.93
SystemPower Input (kW) - Heating (UK)	2.89
SystemPower Input (kW) - Cooling (UK)	2.49
Starting Current (A)	5
SystemRunning Current (A) - Heating / Cooling	4.55 / 4.6
Mains Cable No. Cores	5
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge (kg) - 30m	5

#### **Dimensions**

PKA-RP100FAL

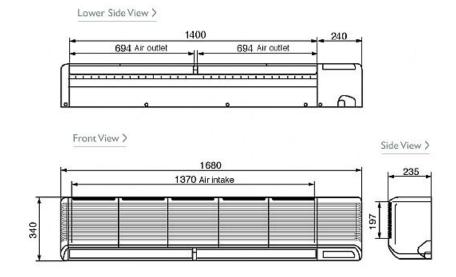

## PUHZ-RP100YHA3

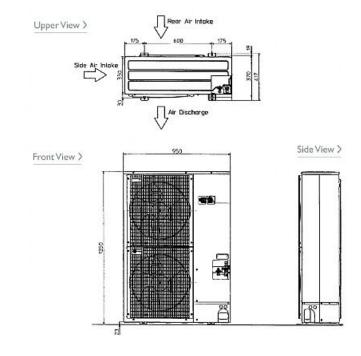



### Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel: Fax:



