



PLA-RP125BA2

Power Inverter Heat Pump

R410A High COP 4-Way Blow Ceiling Cassette System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- **Airflow controllable for ceiling heights up to 4.2m, with automatic adjustment of fan speed**
- **Reduced draft air distribution, with independent vane control**
- **Filter lowering operation down to 4m (optional PLP-6BAJ grille required)**
- **Optional 'I See Sensor' for energy saving and smooth temperature control throughout the room**



Pictures not to scale

Product Details	
Product Name	Advanced Analytics Dashboard
Version	2.1.0
Release Date	2023-10-27
Category	Software
Manufacturer	ABC Corp.
SKU	PROD-12345
Weight	0.5 kg
Dimensions	10 x 10 x 5 cm
Material	Aluminum
Color	Black
Features	Real-time data processing, Customizable reports, API integration
Warranty	1 Year
Support	24/7 Email and Chat

PLA-RP125BA2 Indoor Unit


Capacity (kW):	
Heating (Nominal) (Low - High)	14.00 (5.00 - 16.00)
Cooling (Nominal) (Low - High)	12.50 (5.50 - 14.00)
Heating (UK) (Low - High)	11.90 (4.25 - 13.60)
Cooling (UK) (Low - High)	11.25 (4.95 - 12.60)
SHF R410A (Nominal)	0.81
COP / EER (Nominal)	3.92 / 3.3
Energy Label Heating / Cooling	A / A
Width (grille) - mm	840 (950)
Depth (grille) - mm	840 (950)
Height (grille) - mm	298 (35)
Weight (grille) - kg	27 (6)
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	22-25-28-31
Noise (dBA) - Lo-Mi1-Mi2-Hi	34-36-39-41
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Grille Ref	PLP-6BA GRILLE
Remote Controller Ref	PAR-21MAA

PUHZ-RP125YHA2 Outdoor Unit


Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	130
Noise (dBA) (Heating /Cooling)	52 /50
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	16
SystemPower Input (kW) - Heating (Nominal)	3.57
SystemPower Input (kW) - Cooling (Nominal)	3.79
SystemPower Input (kW) - Heating (UK)	3.18
SystemPower Input (kW) - Cooling (UK)	3.22
Starting Current (A)	5
SystemRunning Current (A) - Heating / Cooling	6.14 / 6.04
Mains Cable No. Cores	5
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge (kg) - 30m	5

Dimensions

PI A-RP125BA2

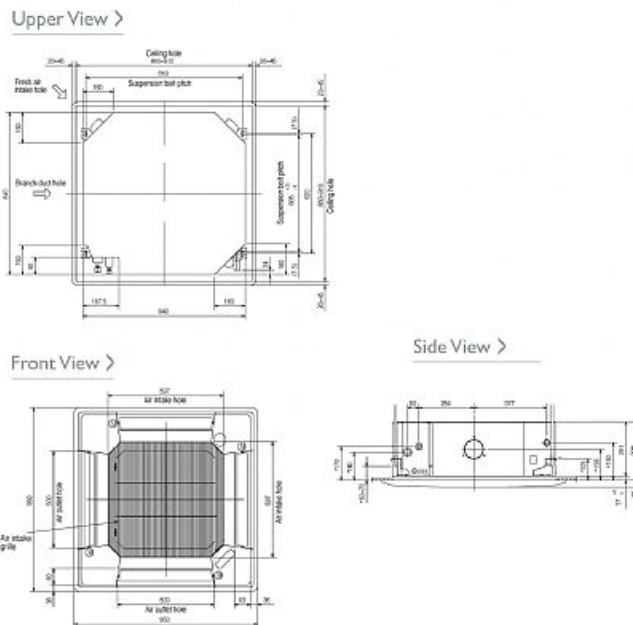

PUHZ-RP125YHA2

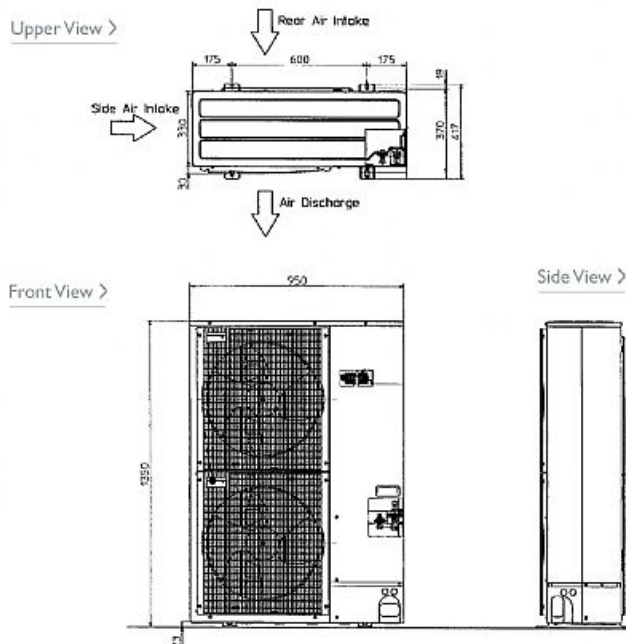

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



Tel:
Fax: