Air Conditioning

Product Information PLA-ZRP60BA : Inverter Heat Pump R410A 4-Way Blow Ceiling Cassette System





Our wide range of Power Inverters offer customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation.





FEATURES



INDOOR Heating Capacity (kW) (nominal) 7.0 (2.8 - 8.2) Cooling Capacity (kW) (nominal) 6.1 (2.7 - 6.5) 5.6 (2.48 - 5.98) Heating Capacity (kW) (UK) Cooling Capacity (kW) (UK) 6 (2.38 - 6.97) SHF (nominal and UK) 0.77 COP / EER (nominal) 3.43 / 3.43 SCOP / SEER 4.2 / 6.1 Energy Efficiency Class - Heating / Cooling A+ / A++ Pipe Size Gas (mm [in]) 15.88 (5/8") Pipe Size Liquid (mm ([in]) 9.52 (3/8") 12 - 14 - 16 - 18 Airflow (m³/min) Lo-Mi-Mi2-Hi Sound Pressure Level (dBA) Lo-Mi-Mi2-Hi 28 - 29 - 31-32 Sound Power Level (dBA) Cooling 55 Dimensions (mm) Width x Depth x Height 840(950) x 840(950) x 258(35) Weight (kg) Unit / grille 23 / 6 FED BY OUTDOOR UNIT Electrical Supply Phase SINGLE Fuse Rating (BS88) - HRC (A) 6 Interconnecting Cable No. Cores 4 OUTDOOR Sound Pressure Level (dBA) Heating / Cooling 48/47 Sound Power Level (dBA) Cooling 67 Weight (kg) 67 Dimensions (mm) Width x Depth x Height 950 x 330+30 x 943 Electrical Supply 220-240V, 50HZ Phase SINGLE System Power Input (kW) - Heating / Cooling 2.04 / 1.90 (nominal) System Power Input (kW) - Heating / Cooling 1.71 / 1.51 (UK) Starting Current (A) 5 System Running Current (A) [MAX] - Heating / 7.13 / 6.49 [19.3] Coolina Fuse Rating (BS88) - HRC (A) 25 Mains Cable No. Cores 3 50 Max Pipe Length (m) Max Height Difference (m) 30

DIMENSIONS






Bolt pitch Ceiling Ceiling

*Note that the space between ceiling panel of the unit and ceiling slab, etc. must be 10 to 15 * When the optional multi-functional casement is installed, add 135 mm to the

		(mm)
Models	С	D
PLA-RP35/50/60/71BA(2) PLA-ZRP35/50/60BA	241	258
PLA-RP100/125/140BA(2) PLA-RP100BA3 PLA-7RP71/100/125/140BA	281	298

DIMENSIONS

PUHZ-ZRP60VHA

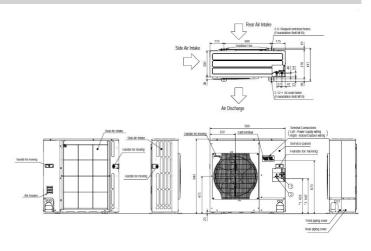



Charge R410A (kg) - Pre charged length (m)

CE

Telephone: 01707 282880 Fax: 01707 278881 Email: airconditioning@meuk.mee.com Website: http://www.airconditioning.mitsubishielectric.co.uk

Country of origin: United Kingdom – Japan – Thailand – Malaysia. © Mitsubishi Electric Europe 2013. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks of their respective owners.

3.5 - 30