# Air Conditioning

## **Product Information**

PLA-ZRP71BA: Inverter Heat Pump

R410A 4-Way Blow Ceiling Cassette System





Our wide range of Power Inverters offer customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation.



## **FEATURES**



































8.80 / 7.81 [19.5]

25

3 50

30

3.5 - 30

















INDOOR		
Heating Capacity (kW) (nominal)	8.0 (3.5 - 10.2	
Cooling Capacity (kW) (nominal)	7.1 (3.3 - 8.1	
Heating Capacity (kW) (UK)	6.8 (3 - 8.65	
Cooling Capacity (kW) (UK)	6.55 (3.05 - 7.45	
SHF (nominal and UK)	0.89	
COP / EER (nominal)	4.02 / 4.0	
SCOP / SEER	4.5 / 6.	
Energy Efficiency Class - Heating / Cooling	A+ / A+-	
Pipe Size Gas (mm [in])	15.88 (5/8"	
Pipe Size Liquid (mm ([in])	9.52 (3/8"	
Airflow (m³/min) Lo-Mi-Mi2-Hi	17 - 19 - 21 - 23	
Sound Pressure Level (dBA) Lo-Mi-Mi2-Hi	28 - 30 - 32-3	
Sound Power Level (dBA) Cooling	56	
Dimensions (mm) Width x Depth x Height	840(950) x 840(950) : 298(35	
Weight (kg) Unit / grille	25 / (	
Electrical Supply	FED BY OUTDOOR UNI	
Phase	SINGLI	
Fuse Rating (BS88) - HRC (A)	6	
Interconnecting Cable No. Cores		
OUTDOOR		
Sound Pressure Level (dBA) Heating / Cooling	48 / 4	
Sound Power Level (dBA) Cooling	6	
Weight (kg)	6	
Dimensions (mm) Width x Depth x Height	950 x 330+30 x 94	
Electrical Supply	220-240V, 50H	
Phase	SINGLI	
System Power Input (kW) - Heating / Cooling (nominal)	1.99 / 1.7	
Custom Davier Innut (I)AA   Heating / Cooling	1.77 / 1.5	
System Power Input (kW) - Heating / Cooling (UK)	1.77 1.5	

## **DIMENSIONS**

#### PLA-ZRP71BA





Outer side of main unit © Grille
Bolt pitch © Ceiling
Ceiling opening @ Multi fun

Outer side of Grille
 Entire periphery


te that the space between ceiling panel of the unit and ceiling slab, etc. must be 10 to 15 mm

When the optional multi-functional casement is installed, add 135 mm to the

		(mm)
Models	С	D
PLA-RP35/50/60/71BA(2) PLA-ZRP35/50/60BA	241	258
PLA-RP100/125/140BA(2) PLA-RP100BA3 PLA-ZRP71/100/125/140BA	281	298

## **DIMENSIONS**

## PUHZ-ZRP71VHA

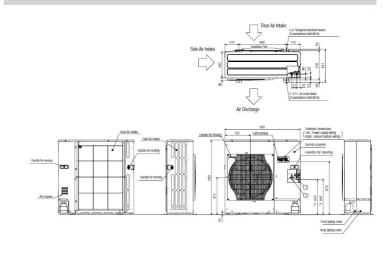



System Running Current (A) [MAX] - Heating /

Charge R410A (kg) - Pre charged length (m)

Fuse Rating (BS88) - HRC (A)

Mains Cable No. Cores

Max Pipe Length (m)

Max Height Difference (m)

Cooling