



PSA-RP71GA

Power Inverter Heat Pump

R410A Floor Standing System

The PSA Floor Standing System complements the Mitsubishi Electric range of indoor units. The sleek, modern design of this unit is ideal for numerous applications including bars and restaurants.

- **Built in controller**



Pictures not to scale

Product Details

PSA-RP71GA Indoor Unit


Capacity (kW):	
Heating (Nominal) (Low - High)	7.60 (3.50 - 10.20)
Cooling (Nominal) (Low - High)	7.10 (3.30 - 8.10)
Heating (UK) (Low - High)	6.45 (3.00 - 8.65)
Cooling (UK) (Low - High)	6.55 (3.05 - 7.45)
SHF R410A (Nominal)	0.73
COP / EER (Nominal)	3.41 / 3.23
Energy Label Heating / Cooling	B / A
Width - mm	600
Depth - mm	270
Height - mm	1900
Weight - kg	43
Airflow (m ³ /min) - Lo-Hi	15-18
Noise (dBA) - Lo-Hi	40-45
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

PUHZ-RP71VHA4 Outdoor Unit

Width - mm	950
Depth - mm	330 +30
Height - mm	943
Weight - kg	67
Noise (dBA) (Heating /Cooling) - Lo-Hi	48 /44-47
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	25
SystemPower Input (kW) - Heating (Nominal)	2.23
SystemPower Input (kW) - Cooling (Nominal)	2.2
SystemPower Input (kW) - Heating (UK)	1.98
SystemPower Input (kW) - Cooling (UK)	1.87
Starting Current (A)	5
SystemRunning Current (A) - Heating / Cooling	9.98 / 9.85
Mains Cable No. Cores	3
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge (kg) - 30m	3.5


Dimensions

PSA-RP71GA

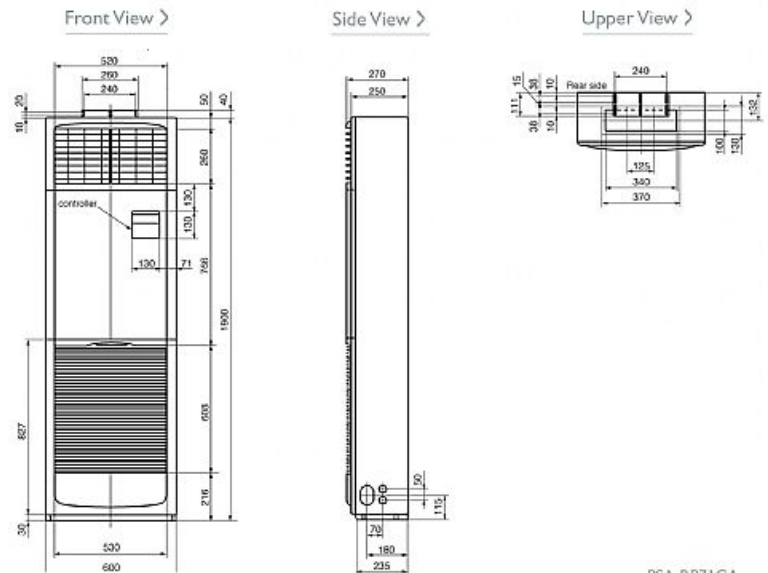

PSA-RP71GA

PUHZ-RP71VHA4

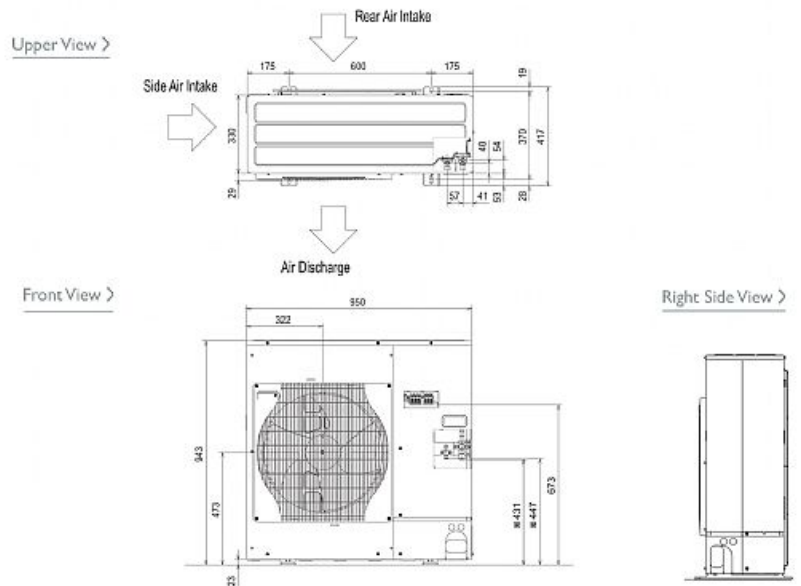

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

