

# Air Conditioning

## Product Information

**PSA-RP125KA : Standard Inverter Heat Pump**

R410A Floor Mounted Unit

Mr.SLIM™



The PSA Floor Standing System compliments the Mitsubishi Electric range of indoor units. The sleek, modern design of this unit is ideal for numerous applications including bars and restaurants.

## FEATURES



### INDOOR


Heating Capacity (kW) (nominal)	14.0 (5 - 16)
Cooling Capacity (kW) (nominal)	12.3 (5.5 - 14)
Heating Capacity (kW) (UK)	11.9 (4.25 - 13.6)
Cooling Capacity (kW) (UK)	11.3 (5.05 - 12.9)
SHF (nominal and UK)	0.72
COP / EER (nominal)	2.81 / 2.81
SCOP / SEER	3.7 / 3.5
Energy Efficiency Class - Heating / Cooling	N/A / N/A
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m³/min) Lo-Hi	25 - 28 - 31
Sound Pressure Level (dBA) Lo-Mi-Hi	45 - 49 - 51
Sound Power Level (dBA) Cooling	66
Dimensions (mm) Width x Depth x Height	600 x 360 x 1900
Weight (kg)	46
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

### OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 51
Sound Power Level (dBA) Cooling	71
Weight (kg)	99
Dimensions (mm) Width x Depth x Height	950 x (330+30) x 1350
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	4.98 / 4.38
System Power Input (kW) - Heating / Cooling (UK)	4.43 / 3.72
Starting Current (A)	15
System Running Current (A) [MAX] - Heating / Cooling	17.47 / 18.10 [28.7]
Fuse Rating (BS88) - HRC (A)	32
Mains Cable No. Cores	3
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge R410A (kg) - pre charged length (m)	4.5 - 30

### DIMENSIONS

PSA-RP125KA

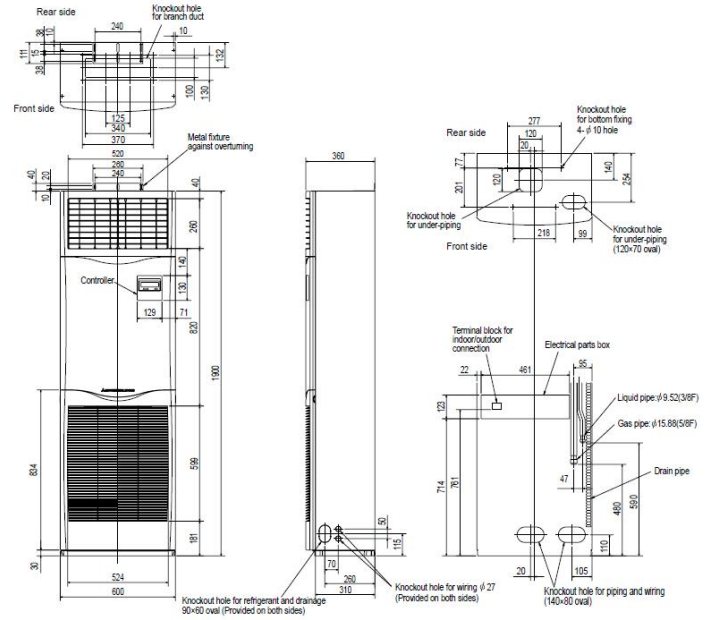

### DIMENSIONS

PUHZ-P125VHA3

