

# Air Conditioning

## Product Information

### PSA-RP140KA : Power Inverter Heat Pump

R410A Floor Mounted System

Mr.SLIM™



The PSA Floor Standing System compliments the Mitsubishi Electric range of indoor units. The sleek, modern design of this unit is ideal for numerous applications including bars and restaurants.

## FEATURES



### INDOOR


Heating Capacity (kW) (nominal)	16.0 (5.7 - 18)
Cooling Capacity (kW) (nominal)	13.4 (6.2 - 15)
Heating Capacity (kW) (UK)	13.6 (4.84 - 15.3)
Cooling Capacity (kW) (UK)	12.3 (5.7 - 13.8)
SHF (nominal and UK)	0.71
COP / EER (nominal)	3.34 / 3.30
SCOP / SEER	4.4 / 5.3
Energy Efficiency Class - Heating / Cooling	N/A / N/A
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m <sup>3</sup> /min) Lo-Hi	25 - 28 - 31
Sound Pressure Level (dBA) Lo-Mi-Hi	45 - 49 - 51
Sound Power Level (dBA) Cooling	66
Dimensions (mm) Width x Depth x Height	600 x 360 x 1900
Weight (kg)	48
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

### OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	52 / 50
Sound Power Level (dBA) Cooling	70
Weight (kg)	119
Dimensions (mm) Width x Depth x Height	1050 x (330+30) x 1338
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	4.79 / 4.06
System Power Input (kW) - Heating / Cooling (UK)	4.26 / 3.45
Starting Current (A)	12
System Running Current (A) [MAX] - Heating / Cooling	20.92 / 19.41 [28.7]
Fuse Rating (BS88) - HRC (A)	40
Mains Cable No. Cores	3
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge R410A (kg) - pre charged length (m)	5 - 30

### DIMENSIONS

PSA-RP140KA

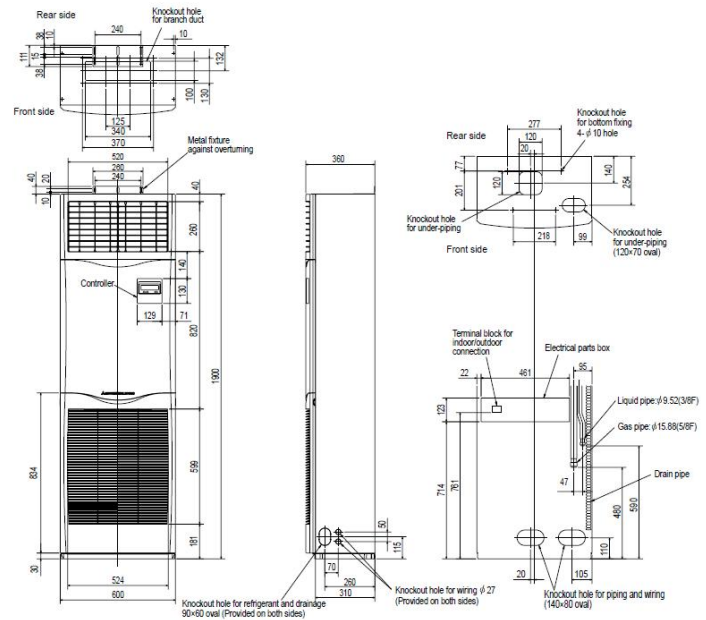

### DIMENSIONS

PUHZ-ZRP140VKA

