


Air Conditioning

Product Information

SEZ-KD71VAQ : Inverter Heat Pump

R410A Ceiling Concealed Ducted System

Mr.SLIM™

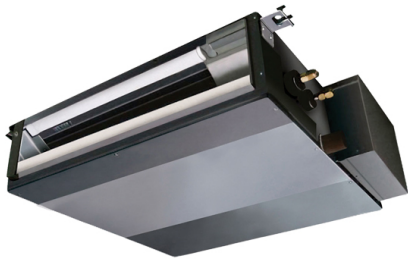

Designed for homes, offices, restaurants or shops, the SEZ series operates at low noise levels and is virtually invisible when installed within a suspended ceiling. Its low unit height and lightweight design also helps to make installation easier and more convenient.

FEATURES



INDOOR


Heating Capacity (kW) (nominal)	8.1 (0.9 - 10.4)
Cooling Capacity (kW) (nominal)	7.1 (0.9 - 8.3)
Heating Capacity (kW) (UK)	6.8 (0.75 - 8.65)
Cooling Capacity (kW) (UK)	7.05 (0.9 - 8.25)
SHF (nominal and UK)	0.74
COP / EER (nominal)	3.57 / 3.01
SCOP / SEER	3.8 / 5.2
Energy Efficiency Class - Heating / Cooling	A / A
Airflow (m ³ /min) Lo-Mi-Hi	12 - 16 - 20
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
External Static Pressure (Pa)	5-15-35-50
Sound Pressure Level (dBA) Lo-Mi-Hi	29 - 34 - 39
Sound Power Level (dBA) Cooling	60
Dimensions (mm) Width x Depth x Height	1190 x 700 x 200
Weight (kg)	27
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 55
Sound Power Level (dBA) Cooling	69
Weight (kg)	53
Dimensions (mm) Width x Depth x Height	840 x 330 x 880
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	2.26 / 2.36
System Power Input (kW) - Heating / Cooling (UK)	2.15 / 1.81
Starting Current (A)	9.29
System Running Current (A) [MAX] - Heating / Cooling	9.79 / 9.69 [17.0]
Fuse Rating (BS88) - HRC (A)	20
Mains Cable No. Cores	3
Max Pipe Length (m)	30
Max Height Difference (m)	30
Charge R410A (kg) - Pre charged length (m)	1.9 - 7

DIMENSIONS

SEZ-KD71VAQ

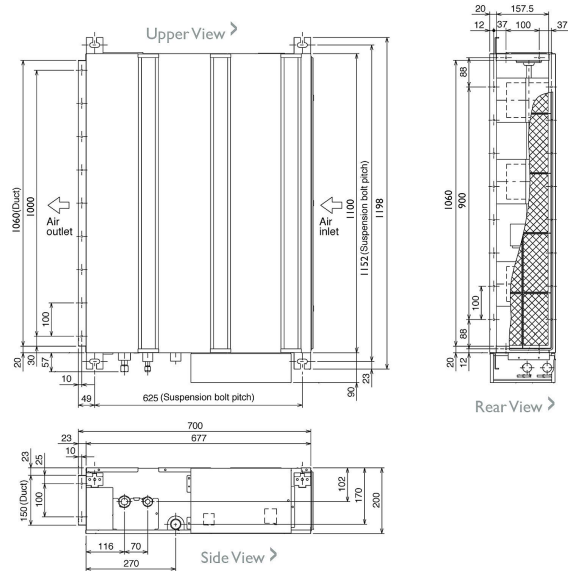

DIMENSIONS

SUZ-KA71VA3

