

Air Conditioning

Product Information

SEZ-KD25VAQ : Inverter Heat Pump

R410A Ceiling Concealed Ducted System



Designed for homes, offices, restaurants or shops, the SEZ series operates at low noise levels and is virtually invisible when installed within a suspended ceiling. Its low unit height and lightweight design also helps to make installation easier and more convenient.

FEATURES



INDOOR


Heating Capacity (kW) (nominal)	2.9 (1.3 - 4.5)
Cooling Capacity (kW) (nominal)	2.5 (1.5 - 3.2)
Heating Capacity (kW) (UK)	2.5 (1.11 - 3.83)
Cooling Capacity (kW) (UK)	2.3 (1.38 - 2.94)
SHF (nominal and UK)	0.8
COP / EER (nominal)	3.61 / 3.42
SCOP / SEER	3.8 / 5.2
Energy Efficiency Class - Heating / Cooling	A / A
Airflow (m ³ /min) Lo-Mi-Hi	6 - 7 - 9
Pipe Size Gas (mm [in])	9.52 (3/8")
Pipe Size Liquid (mm [in])	6.35 (1/4")
External Static Pressure (Pa)	5-15-35-50
Sound Pressure Level (dBA) Lo-Mi-Hi	22 - 25 - 29
Sound Power Level (dBA) Cooling	50
Dimensions (mm) Width x Depth x Height	790 x 700 x 200
Weight (kg)	18
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	48 / 47
Sound Power Level (dBA) Cooling	58
Weight (kg)	30
Dimensions (mm) Width x Depth x Height	800 x 285 x 550
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	0.80 / 0.73
System Power Input (kW) - Heating / Cooling (UK)	0.71 / 0.62
Starting Current (A)	3.8
System Running Current (A) [MAX] - Heating / Cooling	3.50 / 3.80 [7.4]
Fuse Rating (BS88) - HRC (A)	10
Mains Cable No. Cores	3
Max Pipe Length (m)	20
Max Height Difference (m)	12
Charge R410A (kg) - Pre charged length (m)	0.8 - 7

DIMENSIONS

SEZ-KD25VAQ

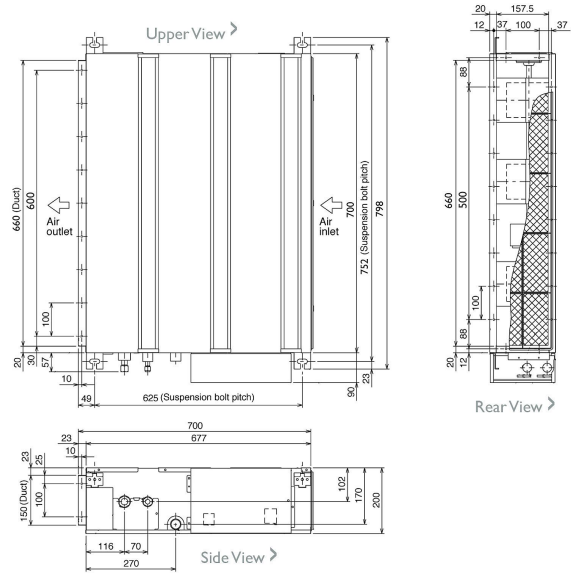

DIMENSIONS

SUZ-KA25VA4

