

# Air Conditioning

## Product Information

### SEZ-KD60VAQ : Inverter Heat Pump

R410A Ceiling Concealed Ducted System

Mr.SLIM™



Designed for homes, offices, restaurants or shops, the SEZ series operates at low noise levels and is virtually invisible when installed within a suspended ceiling. Its low unit height and lightweight design also helps to make installation easier and more convenient.

## FEATURES



### INDOOR


Heating Capacity (kW) (nominal)	7.4 (2.5 - 8)
Cooling Capacity (kW) (nominal)	5.6 (2.3 - 6.3)
Heating Capacity (kW) (UK)	6.3 (2.13 - 6.8)
Cooling Capacity (kW) (UK)	5.15 (2.12 - 5.8)
SHF (nominal and UK)	0.79
COP / EER (nominal)	3.36 / 3.22
SCOP / SEER	4.1 / 5.2
Energy Efficiency Class - Heating / Cooling	A+ / A
Airflow (m <sup>3</sup> /min) Lo-Mi-Hi	12 - 15 - 18
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	6.35 (1/4")
External Static Pressure (Pa)	5-15-35-50
Sound Pressure Level (dBA) Lo-Mi-Hi	29 - 33 - 37
Sound Power Level (dBA) Cooling	58
Dimensions (mm) Width x Depth x Height	1190 x 700 x 200
Weight (kg)	27
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

### OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 55
Sound Power Level (dBA) Cooling	65
Weight (kg)	50
Dimensions (mm) Width x Depth x Height	840 x 330 x 880
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	2.20 / 1.74
System Power Input (kW) - Heating / Cooling (UK)	1.96 / 1.48
Starting Current (A)	9.1
System Running Current (A) [MAX] - Heating / Cooling	7.90 / 9.10 [14.7]
Fuse Rating (BS88) - HRC (A)	20
Mains Cable No. Cores	3
Max Pipe Length (m)	30
Max Height Difference (m)	30
Charge R410A (kg) - Pre charged length (m)	1.6 - 7

### DIMENSIONS

SEZ-KD60VAQ

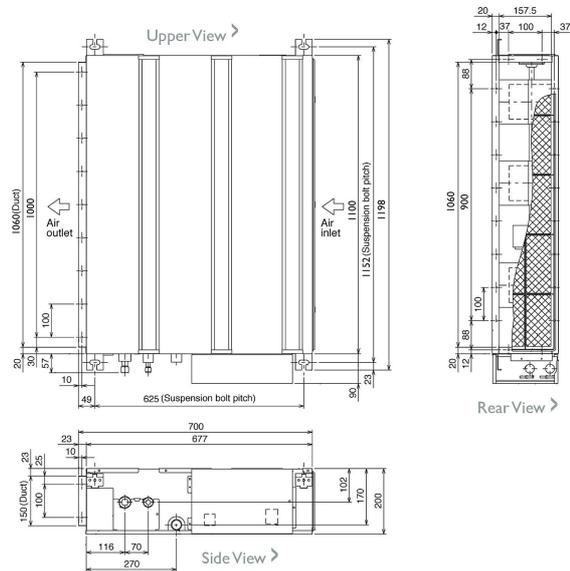

### DIMENSIONS

SUZ-KA60VA4

