Air Conditioning

Product Information

PUHY-HP500YSHM-A: Zubadan Y Series

20hp Outdoor Unit

R410A Heat Pump





The new City Multi Zubadan heat pumps achieve and excellent heating performance even when the outdoor air temperature is as low as -25 degrees C.



FEATURES

Total Piping Length (m)

Furthest Piping Length (m)

Furthest Piping Length After First Branch (m)

Between Indoor and Outdoor units - Height (m)

Max height difference between indoor units (m)











300

165


40

50 15

OUTDOOR	
Heating Capacity (kW) (nominal)	63
Cooling Capacity (kW) (nominal)	56
Heating Capacity (kW) (UK)	70.6
Cooling Capacity (kW) (UK)	49.8
Heating Power Input (kW) (nominal)	18.04
Cooling Power Input (kW) (nominal)	18.16
Heating Power Input (kW) (UK)	30.49
Cooling Power Input (kW) (UK)	14.16
COP / EER (nominal)	3.49 / 3.08
SCOP / SEER	- / 3.25
Max No. of Connectable Indoor Units	43
Airflow (m³/min)	225 / 225
Sound Pressure Level (dBA)	60
Sound Power Level (dBA)	77
Weight (kg)	220 + 220
Dimensions (mm) Width x Depth x Height	920 + 920 x 760 x 1710
Electrical Supply	380-415V, 50HZ
Phase	3
Starting Current (A)	8/8
Running Current (A) - Heating	27.8
Running Current (A) - Cooling	28
Fuse Rating (MCB sizes BS EN 60947-2) - (A)	32 / 32
Mains Cable No. Cores	4 + EARTH
Operating range (Outdoor temp WB) Heating	-25 ~ 15
PIPING RESTRICTIONS	

DIMENSIONS

PUHY-HP500YSHM-A

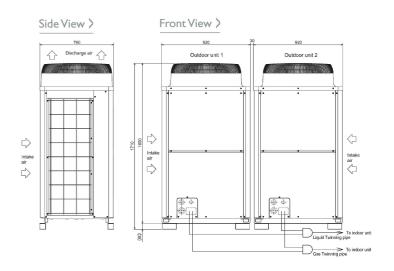



 ϵ