

# Air Conditioning

## Product Information

### PSA-RP71KA : Power Inverter Heat Pump

R410A Floor Mounted System

Mr.SLIM™



The PSA Floor Standing System compliments the Mitsubishi Electric range of indoor units. The sleek, modern design of this unit is ideal for numerous applications including bars and restaurants.

## FEATURES



### INDOOR


Heating Capacity (kW) (nominal)	7.6 (3.5 - 10.2)
Cooling Capacity (kW) (nominal)	7.1 (3.3 - 8.1)
Heating Capacity (kW) (UK)	6.5 (3 - 8.65)
Cooling Capacity (kW) (UK)	6.55 (3.05 - 7.45)
SHF (nominal and UK)	0.75
COP / EER (nominal)	3.44 / 3.76
SCOP / SEER	4 / 6.3
Energy Efficiency Class - Heating / Cooling	A+ / A++
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m <sup>3</sup> /min) Lo-Hi	20 - 22 - 24
Sound Pressure Level (dBA) Lo-Mi-Hi	40 - 42 - 44
Sound Power Level (dBA) Cooling	60
Dimensions (mm) Width x Depth x Height	600 x 360 x 1900
Weight (kg)	46
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

### OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	48 / 47
Sound Power Level (dBA) Cooling	67
Weight (kg)	67
Dimensions (mm) Width x Depth x Height	950 x 330+30 x 943
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	2.21 / 1.89
System Power Input (kW) - Heating / Cooling (UK)	1.97 / 1.61
Starting Current (A)	6
System Running Current (A) [MAX] - Heating / Cooling	8.79 / 7.76 [19.4]
Fuse Rating (BS88) - HRC (A)	25
Mains Cable No. Cores	3
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge R410A (kg) - pre charged length (m)	3.5 - 30

### DIMENSIONS

PSA-RP71KA

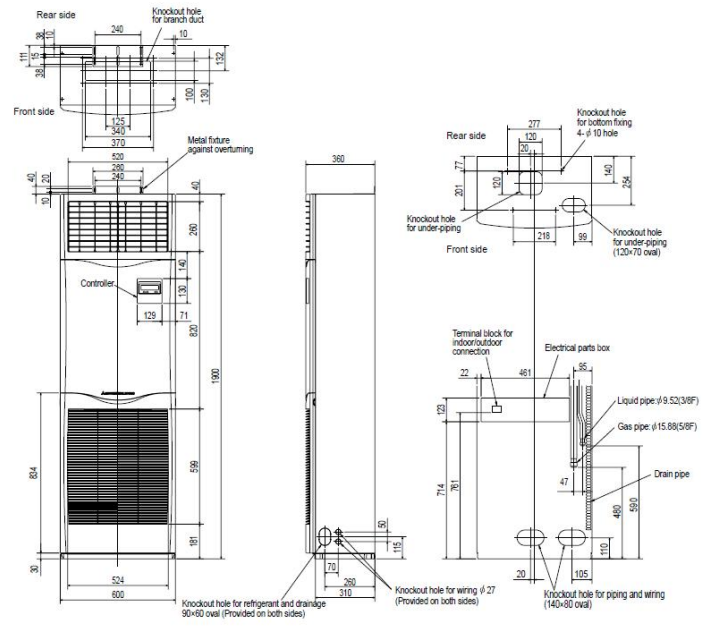

### DIMENSIONS

PUHZ-ZRP71VHA

